



**Public Works Department**  
117 N Molalla Avenue  
PO Box 248  
Molalla, Oregon 97038  
Phone: (503) 829-6855  
Fax: (503) 829-3676

**Request for Quotes | Storey Dr Water Services | 10/03/18**

The City of Molalla (the City) is seeking quotes for the replacement of Eight water services in five trenches on Storey Drive in Molalla. The City has replaced eight similar services on Storey Dr, and found normal digging conditions, with all water services at about 36 inches below grade. The Contractor will replace Eight services using parts supplied by the City in Five trenches which will have asphalt pre-sawcut (including T-Cut) by the City. The Contractor will excavate the asphalt and soil layers, expose the services, coordinate with the City and residents on Storey Dr for brief mainline shutdowns, and replace the services in accordance with City Detail Drawing W-3030 (attached), including the mainline service saddles. All parts for W-3030 will be supplied by the City. The Contractor may, but is not required to, spoil excavation material at the City Shops located at 920 Toliver Rd, which is about 1000 yards away from the job site. The Contractor will backfill the trenches with  $\frac{3}{4}$ - crushed rock supplied by the City and available for the Contractor to pick up at the City Shops. The backfilled trench will be compacted in 6" lifts with jumping jacks and brought to the surface. Once all services are complete the Contractor will asphalt pave all cuts on Storey Drive to 4" thick, roller compacting in 2" lifts, and replace concrete sidewalk panels. There will be approx. 1300 sf of asphalt to pave and 200 sf of sidewalk panels. If the Contractor uses a Subcontractor then the City shall be notified who the Subcontractor is one week in advance.

The Contractor will spare no expense in communicating with residents on Storey Drive, answering their concerns, keeping them informed, and working to limit the impact of the project on these residents. This will include door-to-door warnings before mainline shutdowns, working personally to coordinate equipment placement or resident parking issues, giving estimated time until water service will be restored, and estimated dates that final completion of the project (including asphalt paving) can be expected. In order to safeguard the public and drinking water quality and public infrastructure the Contractor will work under the supervision of the City of Molalla's DHS Certified Direct Responsible Charge, and will comply with all instructions from this person, either verbal or written. The Contractor and any subcontractors will be in possession of a valid City of Molalla Business License (currently a \$35 fee) and carry all the associated Liability, Automotive and Workers Comp Insurance, and proved the Procurement Officer with a copy of this Insurance Certificate. This is a 3-quote Public Works procurement under ORS 279B.070 and is not expected to qualify as a Prevailing Wage Job under BOLI. **The deadline for submitting quotes is Friday 10/19/18**, submit by email to the Procurement Officer. **all work must be completed by 11/16/18**. Those seeking to submit quotes may arrange to visit the site by contacting the Project Manager.


**Procurement Officer**

*Andy Peters*  
City of Molalla  
Public Works Operations Supervisor  
(503) 829-6855 x220  
Cell: 503-793-0507  
[apeters@cityofmolalla.com](mailto:apeters@cityofmolalla.com)  
117 N Molalla Ave  
Molalla, OR 97038

**Project Manager:**

*Adam Shultz*  
City of Molalla  
Cell: 503-793-8402  
[ashultz@cityofmolalla.com](mailto:ashultz@cityofmolalla.com)



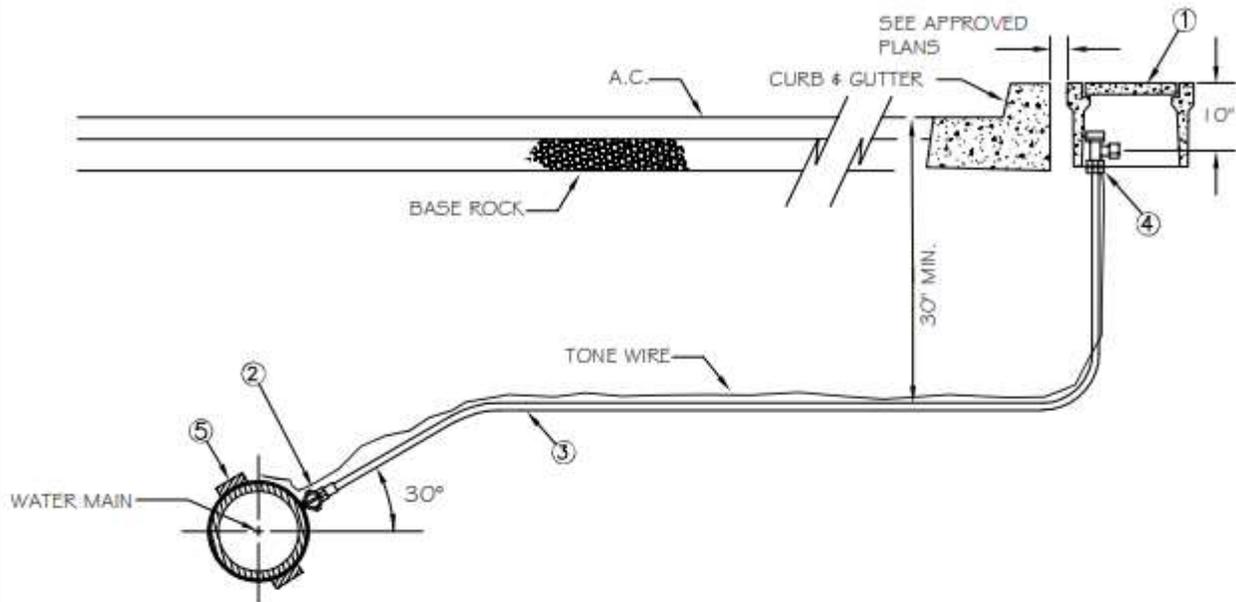

**MATERIALS:**

1. APPROVED BOX, COVER AND LID:
  - OLD CASTLE METER BOX NO. 1118 BCF (BROOKS BOX NO. 37 MB)
  - OLD CASTLE LID NO. COMPOSITE WITH AMR RECESS (BROOKS NO. 37-5)
2. MUELLER CORP. STOP NO. MB25028NF (3/4") or MB25008NF (1").
3. 3/4" or 1" POTABLE WATER PEX PIPE (WRSBO OR APPROVED EQUAL).
4. MUELLER ANGLE METER STOP NO. MB24258NF (3/4") or MB24258NG (1").
5. ROMAC 202NS SERVICE SADDLE OR APPROVED EQUAL. SADDLE CASTING MUST BE BLACK OR BLUE NYLON OR EPOXY COATED, AND BOTH STRAPS MUST BE TYPE 304 (18-8) HEAVY GAUGE.

**NOTES:**

1. SUBSTITUTES FOR ANY MATERIALS SHOWN SHALL BE APPROVED PRIOR TO CONSTRUCTION BY THE PUBLIC WORKS DEPARTMENT.
2. ALL PIPE AND STRUCTURE ZONES SHALL BE BACKFILLED USING 3/4"-O CRUSHED AGGREGATE AND COMPACTED TO 95% MAXIMUM DENSITY AS DETERMINED BY AASHTO T-180.
3. METER BOX SHALL BE H-20 LOAD RATED AND CENTERED OVER THE COMPLETED METER ASSEMBLY.
4. METER BOX SHALL BE LOCATED IN PLANTER AREAS OR AS APPROVED BY THE PUBLIC WORKS DIRECTOR.

Detail Drawing may not be altered or changed in any manner except by the Public Works Director. It is the responsibility of the user to acquire the most current version.

**CITY OF MOLALLA  
DEPARTMENT OF PUBLIC WORKS**



SINGLE SERVICE  
3/4" & 1"

DRAWN BY	PDG	10/2017
CHECKED BY	GF	10/2017

W-3030